

**Anritsu** envision : ensure

# ShockLine™ Compact Vector Network Analyzers

## MS46122B

1 MHz to 43.5 GHz



## Introduction

The MS46122B is part of the ShockLine™ family of Vector Network Analyzers from Anritsu. It is a very low-cost series of 1U high, 2-port Compact Vector Network Analyzers (VNAs). It is available in three frequency ranges: 1 MHz to 8/20/43.5 GHz, and is capable of s-parameter and time domain measurements.

The MS46122B is based on patented ShockLine™ VNA-on-chip technology, which simplifies the internal VNA architecture at high frequencies, reduces instrument cost, and enhances accuracy and measurement repeatability. The combination of low cost and good performance make ShockLine™ VNAs ideal candidates for testing RF and Microwave passive devices to 43.5 GHz.

The MS46122B series is controlled through USB from an external PC. The MS46122B runs the same software as the rest of the ShockLine family, providing a powerful graphical user interface for debugging and manual testing of devices.

This document provides detailed specifications for the MS46122B series Vector Network Analyzers and related options.

## Instrument Models and Operating Frequencies

Base Model

- MS46122B, 2-Port ShockLine VNA

Requires one Frequency Option

- MS46122B-010, 1 MHz to 8 GHz, 2-Port
- MS46122B-020, 1 MHz to 20 GHz, 2-Port
- MS46122B-040, 1 MHz to 43.5 GHz, 2-Port

## Principal Options

- MS46122B-002, Time Domain



MS46122B-040 2-Port ShockLine Compact VNA

Table of Contents

Definitions . . . . . 3

System Dynamic Range . . . . . 4

Receiver Compression Levels . . . . . 4

High Level Noise . . . . . 4

Output Power Settings . . . . . 4

Measurement Stability . . . . . 4

Frequency Resolution, Accuracy, and Stability . . . . . 4

Uncorrected (Raw) Port Characteristics . . . . . 4

MS46122B-010 VNA System Performance with Manual Cal Kits . . . . . 5

MS46122B-020 VNA System Performance with Manual Cal Kits . . . . . 6

MS46122B-040 VNA System Performance with Manual Cal Kits . . . . . 7

MS46122B-010 VNA System Performance with SmartCal™ . . . . . 8

MS46122B-010 and MS46122B-020 VNA System Performance with SmartCal™ . . . . . 9

MS46122B-010 and MS46122B-020 VNA System Performance with SmartCal™ . . . . . 10

MS46122B-040 VNA System Performance with Precision AutoCal™ . . . . . 11

Measurement Throughput . . . . . 11

Standard Capabilities . . . . . 12

Calibration and Correction Capabilities . . . . . 14

Optional Capabilities . . . . . 14

Remote Operability . . . . . 14

Front Panel Connections . . . . . 15

Rear Panel Connections . . . . . 15

Recommended External PC Configuration . . . . . 15

Mechanical . . . . . 16

Regulatory Compliance . . . . . 16

Environmental . . . . . 16

Warranty . . . . . 16

Ordering Information . . . . . 17

Definitions

	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Warm-Up Time	After 30 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Over the 25 °C ± 5 °C temperature range.
Error-Corrected Specifications	Specifications are valid over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature. Error-corrected specifications are warranted and include guard-bands, unless otherwise stated.
Frequency Bands in Tables	When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band.
User Cables	Specifications do not include effects of any user cables attached to the instrument.
Discrete Spurious Responses	Specifications may exclude discrete spurious responses.
Internal Reference Signal	All specifications apply with internal 10 MHz Crystal Oscillator Reference Signal.
Interpolation Mode	All specifications are with Interpolation Mode Off.
Standard	Refers to instruments without Options.
Typical Performance	Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty. Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical. The MS46122B is operational to 43.5 GHz. All specifications above 40 GHz are typical.
Characteristic Performance	Characteristic performance indicates a performance designed-in and verified during the design phase. It does include guard-bands and is not covered by the product warranty.
Recommended Calibration Cycle	12 months (Residual specifications also require calibration kit calibration cycle adherence.)
Specifications Subject to Change	All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: <a href="http://www.anritsu.com">www.anritsu.com</a>

### System Dynamic Range

System dynamic range is calculated as the difference between High source power and the noise floor (RMS) at the specified reference plane at 10 Hz IF Bandwidth with an isolation calibration.

Frequency Range	Standard (dB)	Typical (dB)
1 MHz to 10 MHz	85	105
> 10 MHz to 8 GHz <sup>a</sup>	100	115
> 8 GHz to 43.5 GHz <sup>b</sup>	100	110

a. Crosstalk may reduce dynamic range up to 20 dB (typical) at lower IF bandwidths ( $\leq 10$  kHz) when measuring highly reflective DUT's from 4 GHz to 8 GHz. Reflection measurements are not affected.

b. Decrease specification by 5 dB between 8 GHz and 14 GHz.

### Receiver Compression Levels

Performance is typical.

Frequency Range	Standard (dBm)
1 MHz to 43.5 GHz	+5 dBm

### High Level Noise

Measured at 100 Hz IF bandwidth and at High power level, RMS. Performance is characteristic.

Frequency	Magnitude (dB)	Phase (deg)
1 MHz to < 20 MHz	0.03 (0.005, typical)	< 0.2 (< 0.035 typical)
20 MHz to 43.5 GHz	0.006 (0.001, typical)	< 0.1 (< 0.05 typical) <sup>a</sup>

a. Above 20 GHz, High Level Noise (phase only) is increased by a factor of 1.5.

### Output Power Settings

Performance is typical

Power Setting	Standard (dBm)
High (default)	1 MHz to 8 GHz > 8 GHz to 43.5 GHz
Low	1 MHz to 43.5 GHz

### Measurement Stability

Ratio measurement, with ports shorted. Typical.

Frequency	Magnitude (dB/°C)	Phase (deg/°C)
10 MHz to 43.5 GHz	0.02	0.3

### Frequency Resolution, Accuracy, and Stability

Resolution	Accuracy	Stability	Aging
1 Hz	$\pm 1.0$ ppm (at time of calibration)	$\pm 1.0$ ppm from -10 °C to +55 °C, typical	$\pm 1.0$ ppm/year, typical

### Uncorrected (Raw) Port Characteristics

User and System Correction Off. All specifications typical.

Frequency Range	Directivity (dB)	Port Match (dB)
1 MHz to 43.5 GHz	> 8 dB	> 8 dB

MS46122B-010 VNA System Performance with Manual Cal Kits

**Error-Corrected Specifications**


With 12-term SOLT Calibration using TOSLN50A-8 or TOSLNF50A-8 N type connector calibration kits.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match <sup>a</sup> (dB)	Reflection Tracking <sup>a</sup> (dB)	Transmission Tracking <sup>a</sup> (dB)
1 MHz to 6 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 6 GHz to 8 GHz	≥ 37	≥ 33	≥ 37	±0.15	±0.06

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that  $S_{11} = S_{22} = 0$ . For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

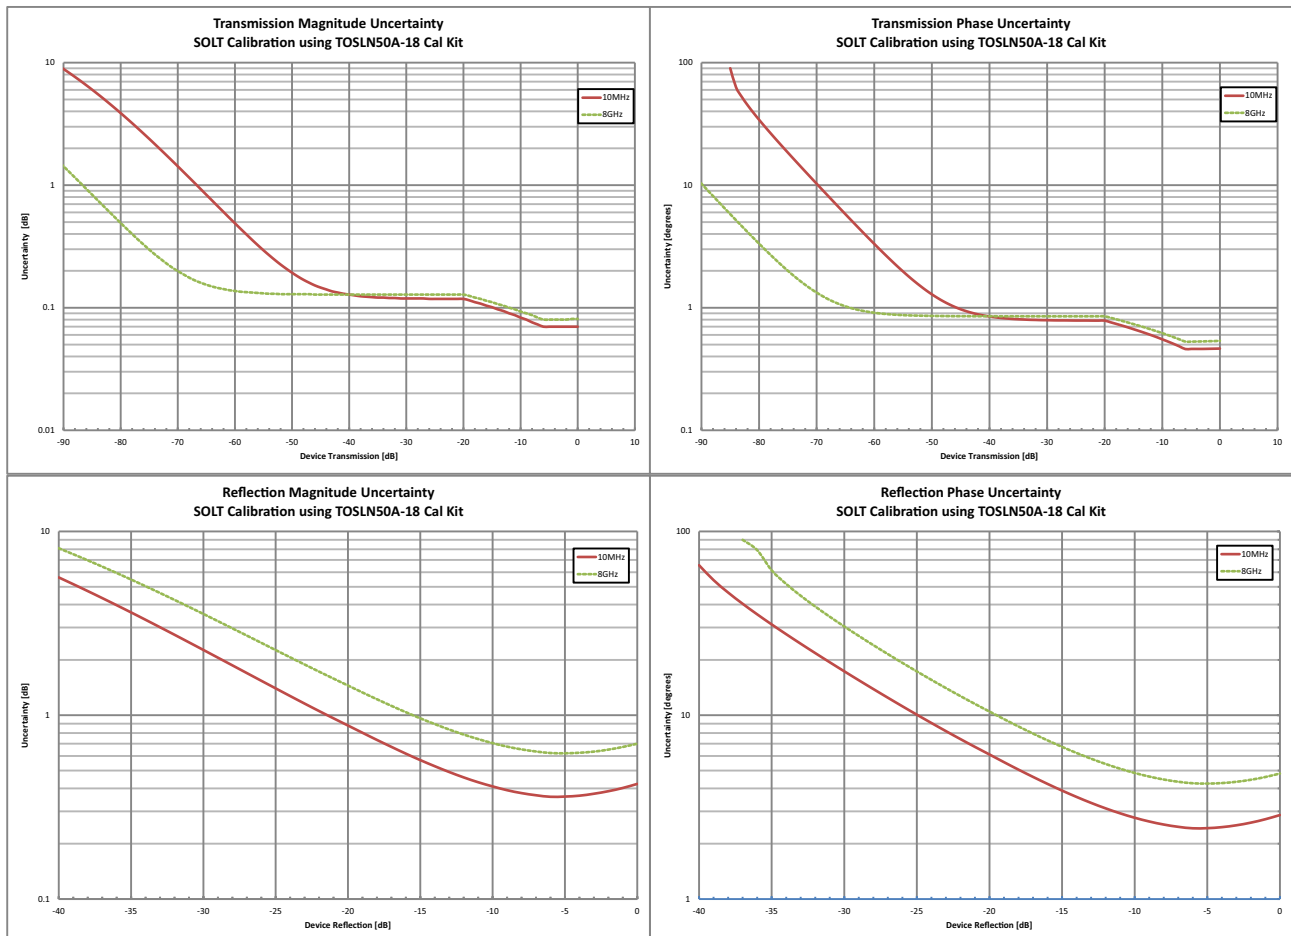

MS46122B-020 VNA System Performance with Manual Cal Kits

**Error-Corrected Specifications**


With 12-term SOLT calibration using the TOSLK50A-20 or TOSLKF50A-20 K type connector calibration kits.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match <sup>a</sup> (dB)	Reflection Tracking <sup>a</sup> (dB)	Transmission Tracking <sup>a</sup> (dB)
1 MHz to 10 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 10 GHz to 20 GHz	≥ 36	≥ 26	≥ 36	±0.15	±0.05

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that  $S_{11} = S_{22} = 0$ . For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

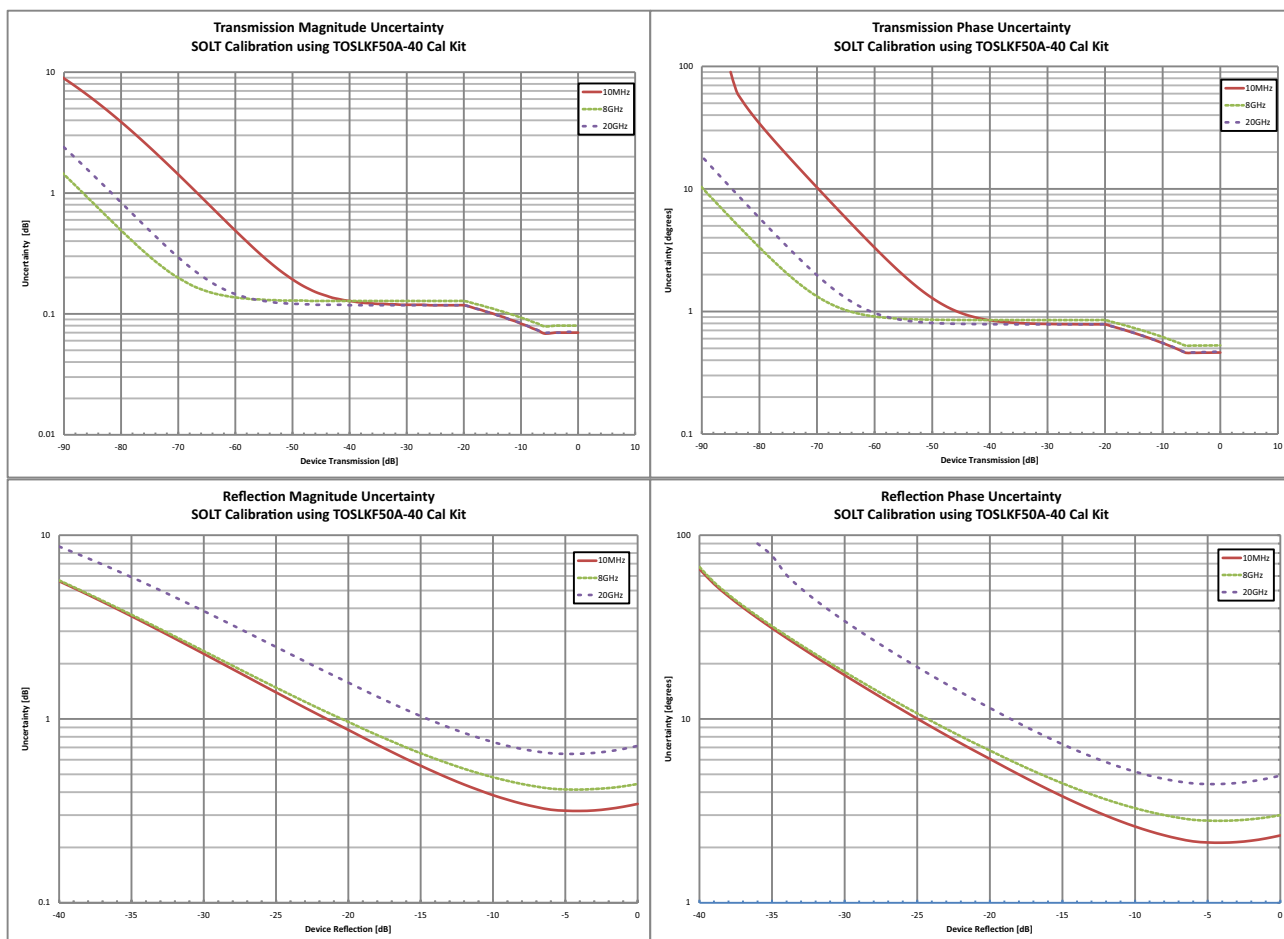

MS46122B-040 VNA System Performance with Manual Cal Kits

**Error-Corrected Specifications**


With 12-term SOLT Calibration using TOSLK50A-40 or TOSLKF50A-40 K type connector calibration kits.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match <sup>a</sup> (dB)	Reflection Tracking <sup>a</sup> (dB)	Transmission Tracking <sup>a</sup> (dB)
1 MHz to 10 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 10 GHz to 20 GHz	≥ 36	≥ 26	≥ 36	±0.15	±0.05
> 20 GHz to 30 GHz	≥ 32	≥ 22	≥ 32	±0.10	±0.05
> 30 GHz to 43.5 GHz	≥ 30	≥ 20	≥ 30	±0.10	±0.05

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that  $S_{11} = S_{22} = 0$ . For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

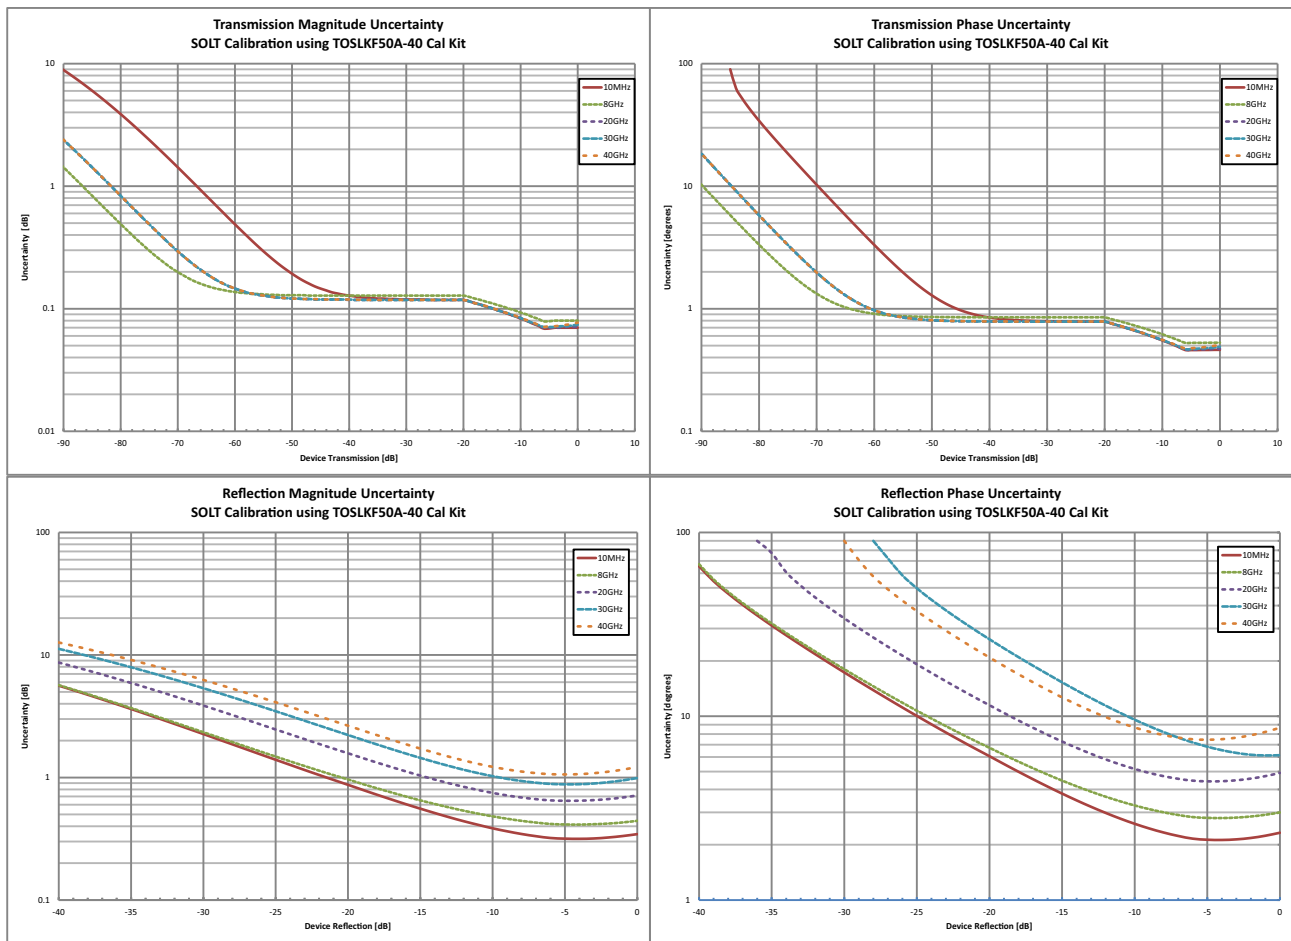

MS46122B-010 VNA System Performance with SmartCal™

Error-Corrected Specifications

With 12-term calibration using the MN25208A SmartCal™ automatic calibration kit with connector options MN25208A-001, -002, -003, and -004.<sup>a</sup>


Frequency Range	Directivity (dB)	Source Match (dB)	Load Match <sup>b</sup> (dB)	Reflection Tracking <sup>b</sup> (dB)	Transmission Tracking <sup>b</sup> (dB)
1 MHz to 3 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
3 GHz to 6 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.08
> 6 GHz to 8 GHz	≥ 37	≥ 33	≥ 37	±0.15	±0.08

a. MN25208A-004: All specifications are typical.

b. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that  $S_{11} = S_{22} = 0$ . For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

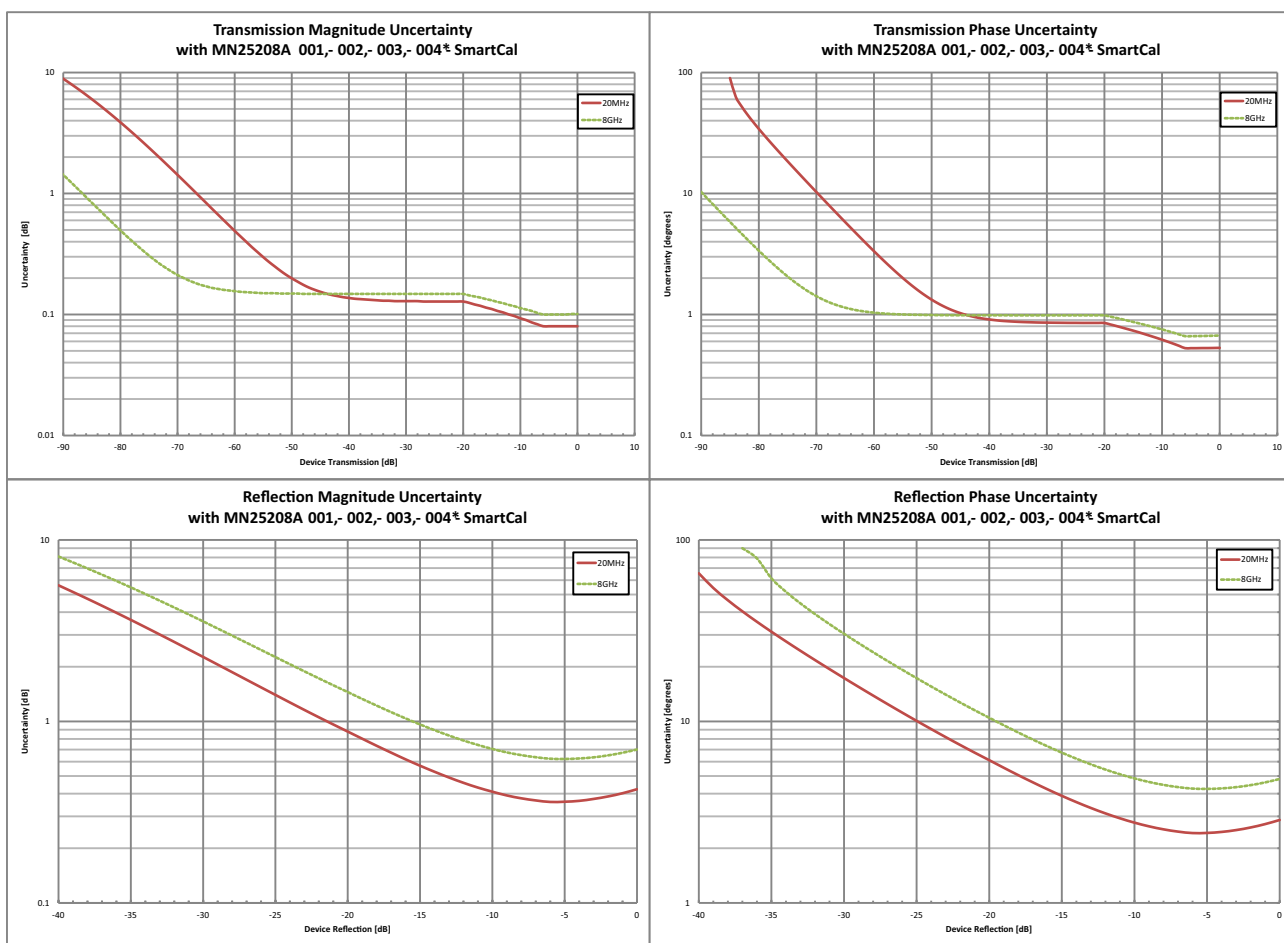

\* Specifications are not warranted. All values are typical.



MS46122B-010 and MS46122B-020 VNA System Performance with SmartCal™

**Error-Corrected Specifications**


With 12-term calibration using the MN25218A SmartCal™ automatic calibration kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match <sup>a</sup> (dB)	Reflection Tracking <sup>a</sup> (dB)	Transmission Tracking <sup>a</sup> (dB)
1 MHz to < 10 MHz	≥ 42	≥ 33	≥ 42	±0.20	±0.20
10 MHz to 6 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 6 GHz to 18 GHz	≥ 37	≥ 33	≥ 37	±0.15	±0.10
> 18 GHz to 20 GHz	≥ 37	≥ 33	≥ 37	±0.20	±0.15

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that  $S_{11} = S_{22} = 0$ . For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

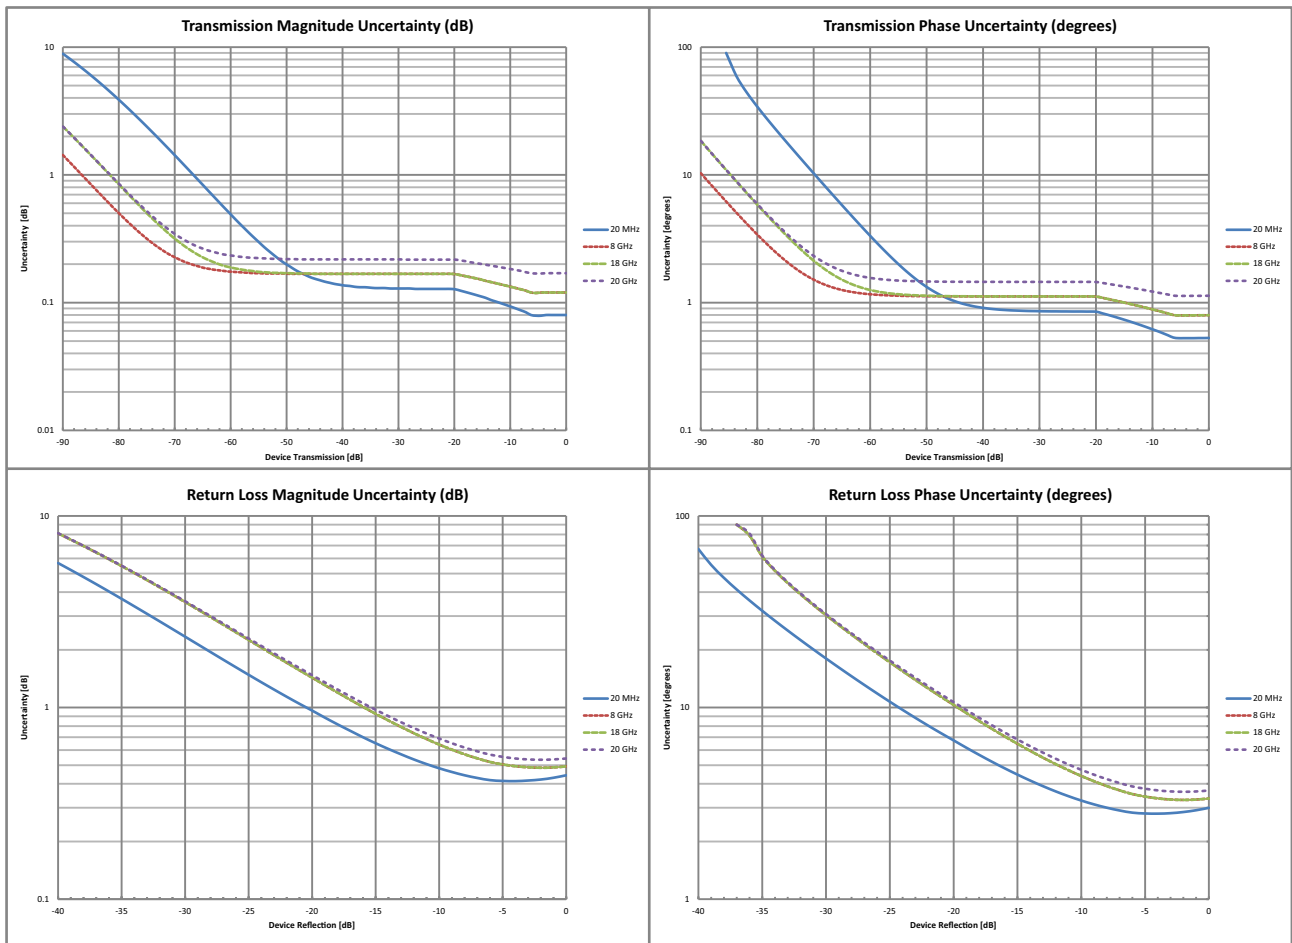

MS46122B-010 and MS46122B-020 VNA System Performance with SmartCal™

**Error-Corrected Specifications**


With 12-term calibration using the MN25418A SmartCal™ automatic calibration kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match <sup>a</sup> (dB)	Reflection Tracking <sup>a</sup> (dB)	Transmission Tracking <sup>a</sup> (dB)
10 MHz to 6 GHz	≥ 40	≥ 31	≥ 42	±0.15	±0.15
> 6 GHz to 18 GHz	≥ 35	≥ 31	≥ 37	±0.20	±0.20
> 18 GHz to 20 GHz	≥ 35	≥ 31	≥ 34	±0.20	±0.25

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that  $S_{11} = S_{22} = 0$ . For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

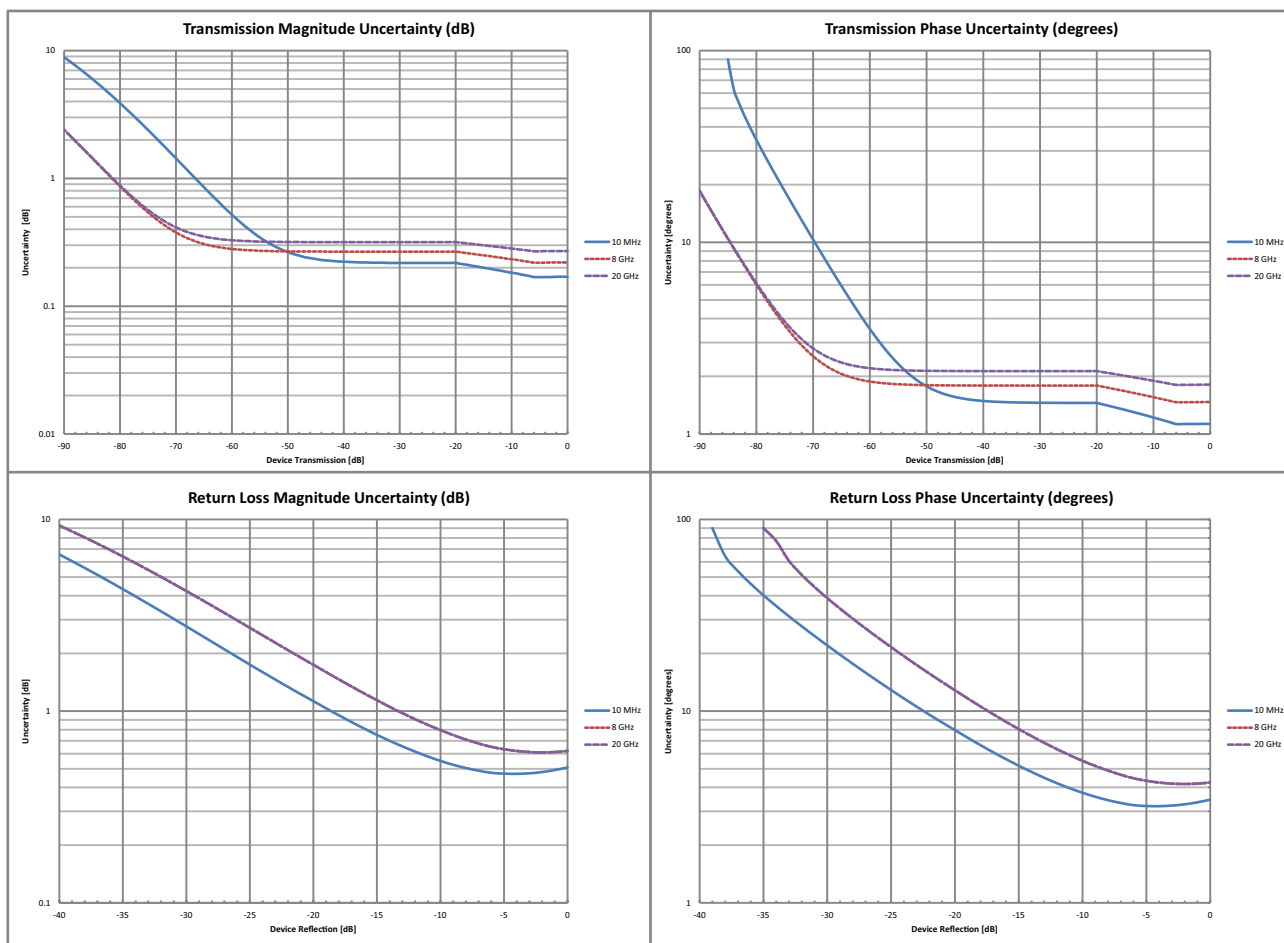

MS46122B-040 VNA System Performance with Precision AutoCal™

**Error-Corrected Specifications**


With 12-term calibration using the 36585K automatic calibration kit with type K connectors. Performance is typical.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match <sup>a</sup> (dB)	Reflection Tracking <sup>a</sup> (dB)	Transmission Tracking <sup>a</sup> (dB)
1 MHz to < 10 GHz	≥ 50	≥ 49	≥ 42	±0.15	±0.06
10 GHz to < 20 GHz	≥ 45	≥ 49	≥ 36	±0.15	±0.05
20 GHz to < 30 GHz	≥ 45	≥ 45	≥ 36	±0.10	±0.05
30 GHz to 40 GHz	≥ 45	≥ 45	≥ 30	±0.10	±0.05

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that  $S_{11} = S_{22} = 0$ . For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

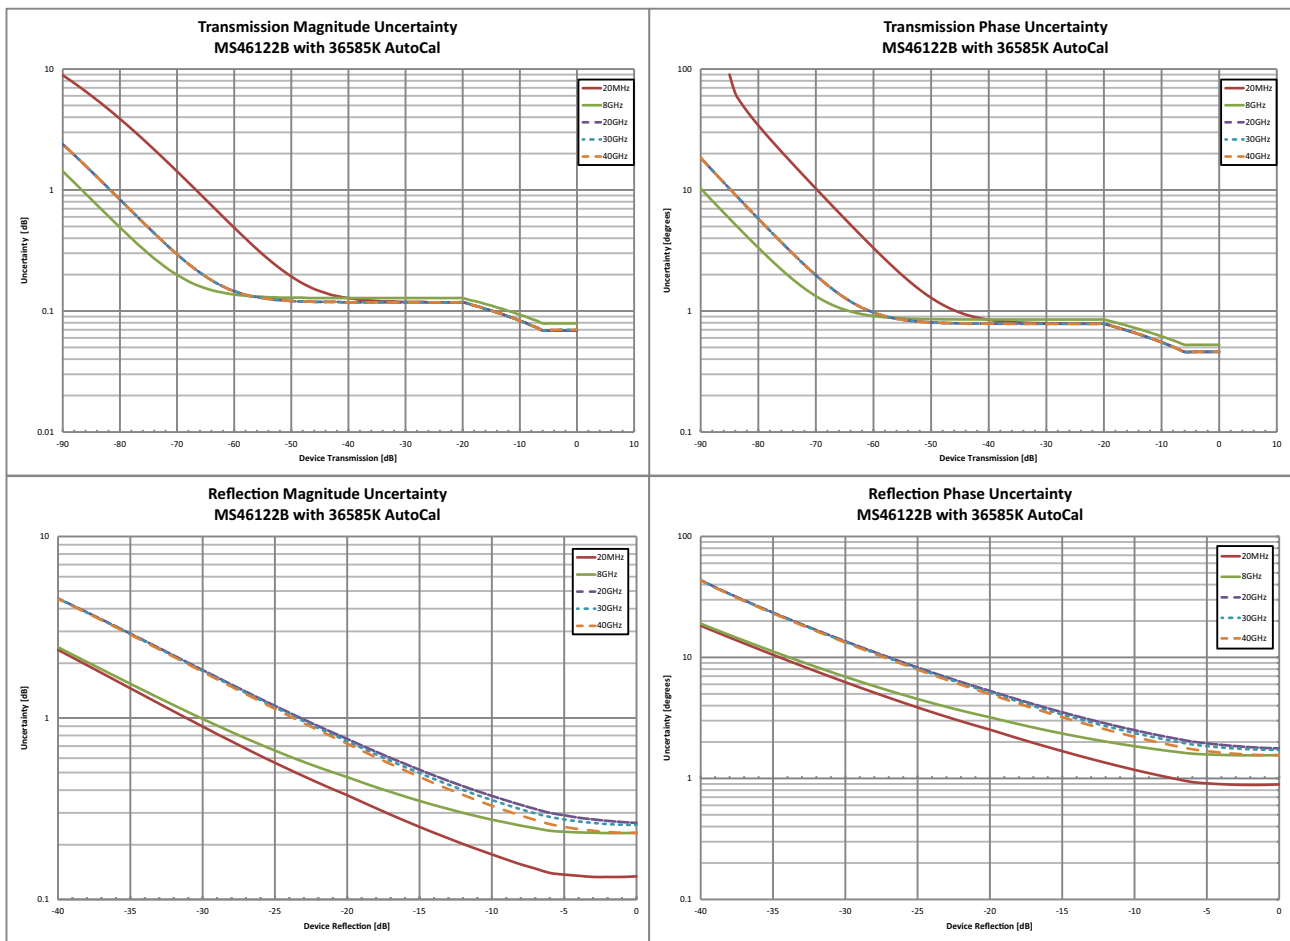

**Measurement Throughput**

**Measurement Speed**

130 μs/point, typical. Per point single sweep time, including placing measurement data into memory. Average of narrow, mid, and wide frequency span sweeps. 300 kHz IFBW, 1601 points, 2 port calibrated data measurement. Timing dependent on external computer configuration. Measurements taken with an Intel® Core™ i5-6300U processor running Windows 7 with 4 GB of RAM and 60 GB of free hard disk space.

## Standard Capabilities

<b>Operating Frequencies</b>		
MS46122B-010	1 MHz to 8 GHz	
MS46122B-020	1 MHz to 20 GHz	
MS46122B-040	1 MHz to 43.5 GHz	
<b>Measurement Parameters</b>		
2-Port Measurements	$S_{11}$ , $S_{21}$ , $S_{22}$ , $S_{12}$ , and any user-defined combination of $a_1$ , $a_2$ , $b_1$ , $b_2$ , 1 Maximum Efficiency Analysis, Mixed-mode SDD, SDC, SCD, SCC	
Domains	Frequency Domain, Time (Distance) Domain (Option 2)	
<b>Sweeps</b>		
Frequency Sweep Types	Linear, Log, or Segmented	
<b>Display Graphs</b>		
Single Rectilinear Graph Types	Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, Impedance, KQ and $\eta$ Max	
Dual Rectilinear Graph Types	Log Mag and Phase, Linear Mag and Phase, Real and Imaginary, KQ and $\eta$ Max	
Circular Graph Types	Smith Chart (Impedance), Polar	
<b>Measurements Data Points</b>		
Maximum Data Points	2 to 16,001 points	
<b>Limit Lines</b>		
Limit Lines	Single or segmented. 2 limit lines per trace. 50 segments per trace.	
Single Limit Readouts	Uses interpolation to determine the intersection frequency.	
Test Limits	Both single and segmented limits can be used for PASS/FAIL testing.	
<b>Ripple Limit Lines</b>		
Limit Lines	Single or segmented. 2 limit lines per trace. 50 segments per trace.	
Ripple Value	Absolute Value or Margin	
Test Limits	Both single and segmented limits can be used for PASS/FAIL testing.	
<b>Averaging</b>		
Point-by-Point	Point-by-point (default), maximum number of averages = 200	
Sweep-by-Sweep	Sweep-by-sweep, maximum number of averages = 4096	
<b>IF Bandwidth</b>		
	10, 20, 50, 70, 100, 200, 300, 500, 700 Hz 1, 2, 3, 5, 7, 10, 20, 30, 50, 70, 100, 200, 300 kHz	
<b>Reference Plane</b>		
Line Length or Time Delay	The reference planes of a calibration or other normalization can be changed by entering a line length or time delay.	
Dielectric Constants	Dielectric constants may be entered for different media so the length entry can be physically meaningful.	
Dispersion Modeling	Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities.	
Attenuations	Attenuations and constant phase offsets can be entered to better describe any reference plane distortions.	
De-embedding	For more complete reference plane manipulation, the full de-embedding system can also be used.	
<b>Measurement Frequency Range</b>		
Frequency Range Change	Frequency range of the measurement can be narrowed within the calibration range without recalibration.	
CW Mode	CW mode permits single frequency measurements also without recalibration.	
Interpolation Not Activated	If interpolation is not activated, the subset frequency range is forced to use calibration frequency points.	
Interpolation Activated	If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error.	
<b>Group Delay</b>		
Group Delay Aperture	Defined as the frequency span over which the phase change is computed at a given frequency point.	
Aperture	The aperture can be changed without recalibration.	
Minimum Aperture	The minimum aperture is the frequency range divided by the number of points in calibration and can be increased to 20 % of the frequency range.	
Group Delay Range	< 180° of phase change within the aperture	

**Channels, Display, and Traces**

Channels and Traces	16 channels, each with up to 16 traces
Display Colors	Unlimited colors for data traces, memory, text, markers, graticules, and limit lines
Trace Memory and Math	A separate memory for each trace can be used to store measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled.
Intra-trace Math	Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace.

**Scale Resolution**

	Minimum per division, varies with graph type.
Log Magnitude	0.001 dB
Linear Magnitude	10 $\mu$ U
Phase	0.01°
Group Delay	0.1 ps
Time	0.0001 ps
Distance	0.1 $\mu$ m
SWR	10 $\mu$ U
Power	0.01 dB

**Markers**

Markers	12 markers + 1 reference marker
Marker Coupling	Coupled or decoupled
Marker Overlay	Display markers on active trace only or on all traces when multiple trace responses are present on the same trace
Marker Data	Data displayed in graph area or in table form
Reference Marker	Additional marker per trace for reference
Marker Statistics	Mean, maximum, minimum, standard deviation Per trace or over a marker region
Marker Search and Tracking	Search and/or track for minimum, maximum, peak, or target value

**Other**

Filter Parameters	Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors.
S-Parameter Conversion	Z Reflection Impedance Z Transmission Impedance Y Reflection Admittance Y Transmission Admittance 1/S

## Calibration and Correction Capabilities

<b>Calibration Methods</b>	Short-Open-Load-Through (SOLT) Offset-Short-Offset-Short-Load-Through (SSLT) Triple-Offset-Short-Through (SSST) Short-Open-Load-Reciprocal (SOLR) Line-Reflect-Line (LRL) / Line-Reflect-Match (LRM) SmartCal™ AutoCal™ Thru Update available
<b>Correction Models</b>	2-Port (Forward, Reverse, or both directions) 1-Port ( $S_{11}$ , $S_{22}$ , or both) Transmission Frequency Response (Forward, Reverse, or both directions) Reflection Frequency Response ( $S_{11}$ , $S_{22}$ , or both)
<b>Coefficients for Calibration Standards</b>	Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files. Enter coefficients into user-defined locations. Use complex load models.
<b>Interpolation</b>	Allows interpolation between calibration frequency points.
<b>Adapter Removal Calibration</b>	Characterizes and “removes” an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices.
<b>Dispersion Compensation</b>	Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip
<b>Embedding/De-embedding</b>	The MS46122B is equipped with an Embedding/De-embedding system.
De-embedding	De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements.
Embedding	Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement.
Multiple Networks	Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily.
Extraction Utility	An extraction utility is part of this package that allows easier computation of de-embedding files based on additional calibration steps and measurements.
<b>Optical/Electrical Conversion</b>	
O/E & E/O	O/E and E/O setup wizard is provided
<b>Impedance Conversion</b>	Allows entry of different reference impedances (complex values) for different ports

## Optional Capabilities

Time Domain Measurements, Option 2	Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate.
------------------------------------	---

## Remote Operability

ShockLine supports several remote operability options.

Communication Type	Data Format	Performance	Description
Drivers	IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python programming environments.		
Triggering	Start Trigger	Software and Digital Edge	
	Input Range	+3.3 V logic level (+5 V tolerant)	
	Minimum Trigger Width	50 ns	
	Trigger Delay	6 $\mu$ s, typical	

Front Panel Connections



MS46122B Front Panel

Test Ports 1 and 2

MS46122B-010	N(f)
MS46122B-020	Ruggedized K(m)
MS46122B-040	Ruggedized K(m)
Damage Input Levels	+23 dBm maximum, ±50 VDC maximum

USB Ports

One mini type B USB port for connecting to an external PC controller.

Power Input

Input connector for external power supply.

10 MHz In

	Signal presence is auto-sensing (better than 10 ppm frequency accuracy is recommended).
Connector Type	BNC(f)
Signal	+0 dBm, typical; 50 Ω, nominal

External Trigger Input

Connector Type	BNC(f)
Voltage Input	0 to 3.3 V input (5 V tolerant)
Impedance	High impedance (> 100 kΩ)
Pulse Width	50 ns minimum input pulse width
Trigger Delay	6 μs typical

Rear Panel Connections



MS46122B Series Rear Panel

Recommended External PC Configuration

CPU	Intel® Core™ i5-6300U Processor
RAM	4 GB
Disk	120 GB
DirectX	Version 9 with Windows Display Driver Model (WDDM) installed
	ShockLine software is compatible with Windows® 7,8, 8.1, or 10; 32 or 64 bit operating systems

**Mechanical**

<b>Dimensions</b>	H x W x D	Dimensions listed are for the instrument body without rack mount option attached. 61.1 mm x 328.1 mm x 197.87 mm
<b>Weight</b>		< 2.2 kg (< 5 lb), typical weight for a fully-loaded MS46122B VNA

**Regulatory Compliance**

European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU applies to instruments with CE marking placed on the market after July 22, 2017
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	KCC-REM-A21-0004

**Environmental**

	MIL-PRF-28800F Class 3
Operating Temperature Range	0 °C to 50 °C
Storage Temperature Range	-40 °C to 71 °C
Maximum Relative Humidity	95 % RH at 30 °C, non-condensing
Altitude	4600 meters, operating and non-operating

**Warranty**

Instrument and Built-In Options	3 years from the date of shipment (standard warranty)
Calibration Kits	Typically 1 year from the date of shipment
Test Port Cables	Typically 1 year from the date of shipment
Warranty Options	Additional warranty available



## Ordering Information

<b>Instrument Models</b>	
Base Model	MS46122B, 2-Port ShockLine™ Economy VNA
Required Option	MS46122B-010, 1 MHz to 8 GHz, type N(f) ports
(Select one frequency option only)	MS46122B-020, 1 MHz to 20 GHz, Ruggedized type K(m) ports (compatible with 3.5 mm and SMA connectors)
	MS46122B-040, 1 MHz to 43.5 GHz, Ruggedized type K(m) ports (compatible with 3.5 mm and SMA connectors)
<b>Included Accessories</b>	
	Each VNA comes with a set of included accessories.
User Documentation	Getting Started with Anritsu Flier, provides access to all ShockLine web content and services.
Power	40-187-R, 12 V, 5 A Power supply (and power cord)
USB Cable	3-2000RS-1815, USB 2.0 A to Mini B cable, 10 ft
Rack Mount	ND80788, Rack Mount Kit adds handles and removes rubber bumpers for shelf-mounting into a 19 inch universal rack
<b>VNA Options</b>	
Main Options	MS46122B-002, Time Domain with Time Gating
Calibration Options	MS46122B-098, Standard Calibration, ISO 17025 compliant, without data
	MS46122B-099, Premium Calibration, ISO 17025 compliant, with data
<b>Precision Automatic Calibrator Modules</b>	
MN25208A	2-port USB SmartCal Module, 300 kHz to 8.5 GHz (available with connector options: -001 N(f), -002 K(f), -003 3.5 mm(f), -004 SMA(f))
MN25408A	4-port USB SmartCal Module, 300 kHz to 8.5 GHz (available with N(f) connectors)
MN25218A	2-port USB SmartCal Module, 1 MHz to 20 GHz (available with K(f) connectors)
MN25418A	4-port USB SmartCal Module, 300 kHz to 20 GHz (available with K(f) connectors)
MN4765B-0070	2-port, 1480 nm to 1620 nm, O/E Calibration Module, 70 kHz to 70 GHz
MN4765B-0071	2-port, 1300 nm to 1330 nm, O/E Calibration Module, 70 kHz to 70 GHz
MN4765B-0072	2-port, dual 1530 nm to 1620 nm and 1300 nm to 1330 nm, O/E Calibration Module, 70 kHz to 70 GHz
36585K-2M	K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(m)
36585K-2F	K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(f) to K(f)
36585K-2MF	K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(f)
2000-1809-R	Serial to USB Adapter (required for use with 36585 AutoCal module if control PC does not have a serial port)
<b>Mechanical Calibration Kits</b>	
3650A	SMA/3.5 mm Calibration Kit, Without Sliding Loads, DC to 26.5 GHz, 50 Ω
3650A-1	SMA/3.5 mm Calibration Kit, With Sliding Loads, DC to 26.5 GHz, 50 Ω
3652A	K Connector Calibration Kit, Without Sliding Loads, DC to 40 GHz, 50 Ω
3652A-1	K Connector Calibration Kit, With Sliding Loads, DC to 40 GHz, 50 Ω
3653A	N Connector Calibration Kit, Without Sliding Loads, DC to 18 GHz, 50 Ω
OSLN50A-8	Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
OSLNF50A-8	Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
TOSLN50A-8	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
TOSLNF50A-8	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
OSLN50A-18	Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
OSLNF50A-18	Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
TOSLN50A-18	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
TOSLNF50A-18	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
TOSLK50A-20	Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω
TOSLKF50A-20	Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω
TOSLK50A-40	Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω
TOSLKF50A-40	Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω
<b>Verification Kit</b>	
3663-3	N Connector Verification Kit
3668-3	K Connector Verification Kit

**RF Cables and Adapters**

1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 $\Omega$
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 $\Omega$
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 $\Omega$
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 $\Omega$
71693-R	Ruggedized adapter, K(f) to N(f), DC to 18 GHz, 50 $\Omega$
34NK50	Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 $\Omega$
34NKF50	Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 $\Omega$
34NFK50	Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 $\Omega$
34NFKF50	Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 $\Omega$
K220B	Precision Adapter, DC to 40 GHz, K(m) to K(m), 50 $\Omega$
K222B	Precision Adapter, DC to 40 GHz, K(f) to K(f), 50 $\Omega$
K224B	Precision Adapter, DC to 40 GHz, K(m) to K(f), 50 $\Omega$

**Test Port Cables, Flexible, Ruggedized, Phase Stable**

15NNF50-1.0B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.0 m
15NNF50-1.5B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.5 m
15NN50-1.0B	Test Port Cable, Flexible, Phase Stable, N(m) to N(m), 1.0 m
15LL50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(m), 1.0 m, 50 $\Omega$
15LLF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m, 50 $\Omega$
15KK50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(m), 1.0 m, 50 $\Omega$
15KKF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m, 50 $\Omega$
3671KFS50-60	Test Port Cable, Flexible, Phase Stable, DC to 26.5 GHz, K(f) to 3.5 mm(m), 63.5 cm, 50 $\Omega$
3671KFK50-60	Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(m), 63.5 cm (25 in), 50 $\Omega$
3671KFKF50-60	Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(f), 63.5 cm (25 in), 50 $\Omega$
3671KFK50-100	Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(m), 1 m (38 in), 50 $\Omega$
SC8267	1.0 m (36"), Cable, 40 GHz, K(m) to K(f), 50 $\Omega$

**Phase-Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)**

3670K50-1	0.3 m (12"), DC to 40 GHz, K(f) to K(m), 50 $\Omega$
3670K50-2	0.6 m (24"), DC to 40 GHz, K(f) to K(m), 50 $\Omega$
3670N50-1	0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 $\Omega$
3670NN50-1	0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 $\Omega$
3670N50-2	0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 $\Omega$
3670NN50-2	0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 $\Omega$

**Tools**

01-201	Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in) (for tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors)
01-203	Torque End Wrench, 13/16 in, 0.9 N·m (8 lbf·in) (for tightening ruggedized SMA, 2.4 mm, K and V test port connectors)
01-204	End Wrench, 5/16 in, Universal, Circular, Open-ended (for SMA, 3.5 mm, 2.4 mm, K, and V connectors)
More Information	Refer to our Precision RF & Microwave Components Catalog for descriptions of adapters and other components.

**Documentation**

User Documentation	Soft copies of the manuals as Adobe Acrobat PDF files are available for download from the instrument model web page at <a href="http://www.anritsu.com">www.anritsu.com</a> . For more information and product support, please contact <a href="mailto:ShockLineVNA.support@Anritsu.com">ShockLineVNA.support@Anritsu.com</a> .
10100-00067	Product information, compliance, and safety
10410-00340	MS46122A/B Series VNA Operation Manual
10410-00337	MS46121A/B, MS46122A/B, and MS46322A/B Series VNA User Interface Reference Manual
10410-00746	ShockLine Series VNA Programming Manual, for IEEE 488.2 and SCPI Commands

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### • United States

#### Anritsu Company

1155 East Collins Blvd, Suite 100  
Richardson, TX 75081, U.S.A.  
Toll Free: 1-800-267-4878  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

### • Canada

#### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120  
Kanata, Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

#### Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 Bela Vista, São Paulo, SP, Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

#### Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
11520 México, D.F., México  
Phone: +52-55-1101-2370  
Fax: +52-55-5254-3147

### • United Kingdom

#### Anritsu EMEA Ltd.

200 Capability Green  
Luton, Bedfordshire LU1 3LU  
United Kingdom  
Phone: +44-1582-433280  
Fax: +44-1582-731303

### • France

#### Anritsu S.A.

12 Avenue du Québec  
Bâtiment Iris 1-Silic 612  
91140 Villebon-sur-Yvette, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

### • Germany

#### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

#### Anritsu S.r.l.

Via Elio Vittorini 129  
00144 Roma, Italy  
Phone: +39-06-509-9711  
Fax: +39-06-502-2425

### • Sweden

#### Anritsu AB

Kistagången 20B  
164 40 KISTA, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

### • Finland

#### Anritsu AB

Teknobulevardi 3-5  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

### • Denmark

#### Anritsu A/S

Kay Fiskers Plads 9  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200  
Fax: +45-7211-2210

### • Russia

#### Anritsu EMEA Ltd.

**Representation Office in Russia**  
Tverskaya str. 16/2, bld. 1, 7th floor  
Moscow, 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

#### Anritsu EMEA Ltd.

**Representation Office in Spain**  
Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 8  
28046, Madrid, Spain  
Phone: +34-915-726-761  
Fax: +34-915-726-621

### • United Arab Emirates

#### Anritsu EMEA Ltd.

**Dubai Liaison Office**  
902, Aurora Tower,  
P O Box: 500311- Dubai Internet City  
Dubai, United Arab Emirates  
Phone: +971-4-3758479  
Fax: +971-4-4249036

### • India

#### Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage  
Indiranagar, 100ft Road, Bangalore - 560038, India  
Phone: +91-80-4058-1300  
Fax: +91-80-4058-1301

### • Singapore

#### Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shiro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • P.R. China (Shanghai)

#### Anritsu (China) Co., Ltd.

27th Floor, Tower A  
New Caohejing International Business Center  
No. 391 Gui Ping Road Shanghai, Xu Hui Di District  
Shanghai 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

#### Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower  
Concordia Plaza  
No. 1 Science Museum Road, Tsim Sha Tsui East  
Kowloon, Hong Kong, P. R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

#### Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi  
Kanagawa, 243-0016 Japan  
Phone: +81-46-296-1221  
Fax: +81-46-296-1238

### • Korea

#### Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si  
Gyeonggi-do, 13494 Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

#### Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

#### Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd, Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

List Revision Date: 20160317